


# The Twister XL<sub>3</sub>

The TWISTER XL 3™ is a motorized back-pack ULV sprayer designed to take the weight and stress off of the operators hand and wrist to ensure ease and comfort while working. The ability to adjust and maintain solution output rates make the TWISTER XL 3 ideal for controlling mosquitoes, flies, gnats and other flying insects.

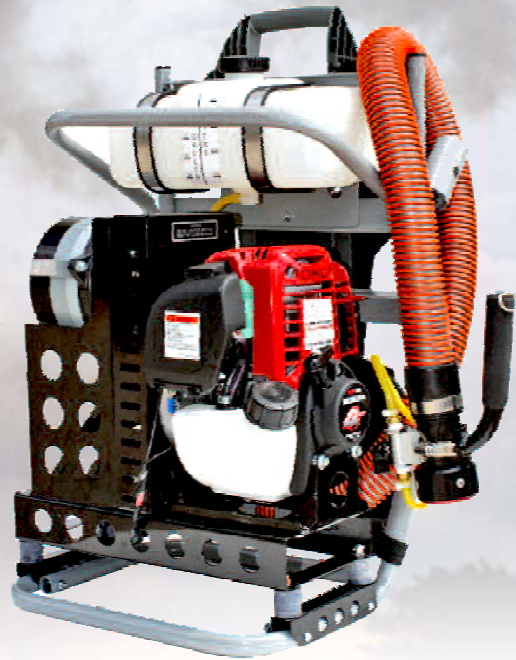

The TWISTER XL 3™ features a high performance **Honda** 4-stroke engine, which gives unequaled fuel efficiency coupled with a level of emissions so low as to exceed all current or anticipated hydrocarbon emission regulations.

The MICROTEC™ nozzles will produce 95% of the droplets below 20 microns when used at the recommended flow rates. This meets the requirements of all current chemical labels for controlling flying insects. When the high flow rate is discharged through a single nozzle the TWISTER XL 3™ will produce larger droplets of 50 microns suitable for applying a residual deposit to vegetation and any other surface.

The TWISTER XL 3™ is built from only the highest quality materials. Coated with chemical resistant epoxy paint, this unit will give reliable usage with the very minimum of maintenance. Backed by a B&G DynaFog warranty.

## **TWISTER XL 3 Standard Features:**

- Four cycle Honda engine.
- Engine quick cut-off switch.
- 3 stage high output rotary blower.
- All formulation controls at operators hand.
- Small frame size and adjustable padded shoulder and waist straps to suit all body sizes.
- Single nozzle produces precise droplet size. Double nozzle head is optional.
- Visual warning pennant on 26" telescopic mast.
- Fuel mixing beaker and funnel included.
- Flow meter to determine the viscosity value of individual formulations.
- 1 year warranty

## **TWISTER XL3 Specifications:**

- ENGINE:** Honda GX-34 4 stroke, overhead cam, 100cc with 7500RPM operating speed
- BLOWER:** Belt driven, high speed rotary, 3 stage steel shaft - 95 cfm at 3 psi.
- NOZZLES:** Single MICROTEC™ nozzle. Twin nozzle unit optional.
- OUTPUT** at 7500 rpm w/water:  
Single nozzle: 1.5oz./min up to 3.3oz./min.  
Twin nozzles: 17.0 oz./min.
- DROPLET SIZE:**  
95% droplets below 20 microns VMD at flow rates up to 6 fl.oz per minute.
- TANKS:** Formulation = 1 gal. Fuel: =17 floz.
- SPECS:** 15"W x 12"D x 22.5"H, 36lbs.



**Nixalite® of America Inc**

1025 16th Avenue, East Moline, IL 61244

Experts In Architectural Bird Control Since 1950

P: 800.624.1189 or 309.755.8771

F: 800.624.1196 or 309.755.0077

E: [birdcontrol@nixalite.com](mailto:birdcontrol@nixalite.com)

[www.nixalite.com](http://www.nixalite.com)